

BackLED RGBW Plus G2

Moduły LED do zastosowań reklamowych i podświetlania



Cechy produktu

- Podłączenie za pomocą elastycznych przewodów
- Specjalna, solidna obudowa
- Oznaczenie CE
- Regulacja strumienia świetlnego poprzez modulację szerokości impulsu (PWM)

Korzyści ze stosowania produktu

- Łatwe mocowanie za pomocą śrub M3
- Szeroka paleta mieszania barw (w połączeniu z systemami sterowania oświetleniem)
- Równomierne podświetlenie dużych powierzchni dzięki szerokokątnemu układowi optycznemu
- Łatwe podłączenie dzięki odsłoniętym końcom przewodów
- 5-letnia gwarancja



Karta katalogowa rodziny produktów

Obszar zastosowań

- Special-purpose and decorative lighting applications
- Dynamiczne podświetlenie barwne
- Dynamiczne oświetlenie nastrojowe
- Spa
- Sklepy
- Restauracje
- Oświetlenie targów przemysłowych
- Eksploatacja ciągła na zewnątrz w zamkniętych light boksach lub literach przestrzennych

Karta katalogowa rodziny produktów

Dane techniczne

Dane elektryczne

Opis produktu	Napięcie nominalne	Nominalna moc modułu LED	Accidental reverse input voltage protection up to	Zakres napięcia wejściowego	Rodzaj prądu
BA-RGBW-PL G2	24,0 V	2,84 W	24 V	23...25 V	DC

Dane fotometryczne

Opis produktu	Barwa światła (oznaczenie)	Barwa światła LED	Str. świetlny dla łańcucha z modułu mi	Skuteczność świetlna	Standardowe odchylenie dopasowania barw
BA-RGBW-PL G2	RGBW	RGB, 6500 K	2310 lm	54 lm/W	≤5 sdc

Dane o module LED


Opis produktu	Liczba LED w module	Liczba modułów LED w łańcuchu	Minim. liczba działających modułów LED
BA-RGBW-PL G2	8	15	3

Wymiary i waga

Opis produktu	Masa produktu
BA-RGBW-PL G2	900,00 g

Karta katalogowa rodziny produktów

Linia produktów z numerami

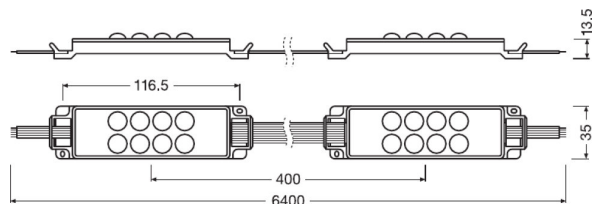

BA-RGBW-PL G2

Temperatury i warunki pracy

Opis produktu	Zakres temperatury pracy	Zakres temperatury magazynowania
BA-RGBW-PL G2	-25...75 °C	-25...65 °C

Dodatkowe dane produktu

Opis produktu	Produkt zastępczy EAN
BA-RGBW-PL G2	4052899452930

Możliwości

Opis produktu	Zakres regulacji
BA-RGBW-PL G2	5...100 %

Karta katalogowa rodziny produktów

Certyfikaty i Normy

Opis produktu	Typ zabezpieczenia	Normy
BA-RGBW-PL G2	IP66	CE

Dane logistyczne

Opis produktu	Kod taryfy celnej
BA-RGBW-PL G2	85395100000

Environmental information
Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)

Opis produktu	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
BA-RGBW-PL G2	16-06-2023	4062172030168	No declarable substances contained

Opis produktu	Declaration No. in SCIP database
BA-RGBW-PL G2	No declarable substances contained

Wyposażenie / Akcesoria

- Do wyboru kilka typów zasilaczy OPTOTRONIC 24 V
- Profil montażowy BoxLED

Wskazówki dotyczące zastosowania

Więcej szczegółowych informacji dotyczących grafik i zastosowania znajduje się w karcie katalogowej produktu

Karta katalogowa rodziny produktów

Karta katalogowa, teks

- Installation of LED modules (with power supplies) needs to be made under consideration of all valid regulations and norms.
- Installation by qualified electrician only.
- Please see the relevant application guides and instructions sheets for more detailed safety and mounting information. Additional information is available on request.
- Complies with IEC/EN 61547
- Complies with IEC/EN 61000-3-2
- Complies with EN 55015, CISPR 15
- Complies with IEC/EN 61347-1
- Complies with IEC/EN 61347-2-13
- LED modules are dimmable by means of PWM (pulse width modulation). It is recommended using the following OSRAM control gears: OPTOTRONIC OT DIM or OPTOTRONIC 24 V power supplies with integrated 1...10 V dimming interface.
- Parallel connection is mandatory for safe electrical operation. Serial connection of LED modules is strongly discouraged. Unbalanced voltage drop in serial connection can cause hazardous overload and damage the LED module.
- Electrical contact is achieved with the contact cables or the terminals of the module. Please refer to the technical data for maximum number of LED modules that can be operated on one control gear.
- In order to operate OSRAM LED modules safely, it is absolutely necessary to operate them with an electronically stabilized power supply that protects against short circuits, overload and overheating.
- In case other power supplies than OSRAM OPTOTRONIC are used, compliance to the necessary operating parameters (voltage, current, power) has to be ensured.
- Pay attention to polarity! Wrong polarity can cause destruction or malfunction of the module.
- Conducting paths on the circuit board must not be damaged or destroyed during installation.
- The LED module itself and all its components must not be stressed mechanically.
- Operation in or under water is prohibited.
- To avoid mechanical damage, the LED modules have to be attached securely to the intended mounting surface. It is recommended to avoid heavy vibration.
- In case that the LED module is equipped with a pre-mounted double-sided adhesive tape, OSRAM assumes no liability and provides no guarantee for a permanent adherence of the modules to the surface. OSRAM recommends fixation of the modules by means of suitable screws.
- Complies with IEC 61347-1 cl. 18.3, cl. 18.4, IEC 60695-2-10, IEC 60695-11-5, IEC 60695-11-10 (classification V-0)
- All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the specified typical values for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values.
- Module contains no PVC material.
- To ensure uniform illumination, a reflective matt white surface is generally recommended for all internal frame walls and back panels of light boxes.
- The module may cause noises during dimming. If a dimming operation is required, it is recommended to check the dimming operation for noises before final installation.

Sprzedaż i pomoc techniczna

Sprzedaż i pomoc techniczna www.osram.com

Pobierz dane

Plik	
	User instruction UI BackLED TW and RGBW Plus G2

Karta katalogowa rodziny produktów

	Broszury Technical application guide BackLED and BoxLED portfolio (EN)
	Deklaracje zgodności BACKLED PLUS G15 CE 3320783 06 260723
	Deklaracje zgodności 727532_Manufacturer's Declaration BackLED PLUS
	Dane CAD 728616_CAD_BackLED RGBW Plus G2_dwg
	Dane CAD 728617_CAD_BackLED RGBW Plus G2_isg
	Dane CAD 3-dim 728618_CAD_BackLED RGBW Plus G2_step
	Dane CAD PDF 728615_CAD BackLED RGBW Plus G2_pdf
	Eulumdat 728621_BackLED RBGW Plus G2 BA-RGBW-PL_Blue_4052899452930
	Eulumdat 728622_BackLED RBGW Plus G2 BA-RGBW-PL_Green_4052899452930
	Eulumdat 728623_BackLED RBGW Plus G2 BA-RGBW-PL_RGBW_4052899452930
	Eulumdat 728624_BackLED RBGW Plus G2 BA-RGBW-PL_Red_4052899452930
	Eulumdat 728625_BackLED RBGW Plus G2 BA-RGBW-PL_White_4052899452930
	IES data IES_BackLED RBGW Plus G2
	IES data IES_BackLED RBGW Plus G2
	IES data IES_BackLED RBGW Plus G2
	IES data IES_BackLED RBGW Plus G2
	IES data IES_BackLED RBGW Plus G2

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Dane logistyczne

Kod produktu	Opis produktu	Opakowanie (liczba produktów / opakowanie)	Wymiary (długość x szerokość x wysokość)	Objętość	Waga brutto
4062172030168	BA-RGBW-PL G2	Karton wysyłkowy 5	473 mm x 328 mm x 292 mm	45.30 dm ³	7277.00 g

Wymieniony kod produktu oznacza najmniejszą ilość produktu, jaka może być zamówiona. Jednostka transportowa może zawierać jedną sztukę lub więcej. Składając zamówienie prosimy o zamawianie ilości odpowiadających jednej lub wielokrotności jednostki transportowej.

Odnosińniki/łącza

For more information on the multi-level guarantee and the terms and conditions of the guarantee visit <https://www.inventronics-light.com/multilevel-guarantees>

Oświadczenie

Zastrzega się możliwość zmian bez uprzedzenia. Błędy i ominięcia są możliwe. Należy zawsze upewnić się czy korzystasz z najnowszej wersji katalogu.