

LF1100TW-G5 -927.957-09 L2

LINEARlight FLEX Tunable White IP00 | Liniowe moduły LED przeznaczone do uniwersalnych i zindywidualizowanych rozwiązań oświetleniowych



Cechy produktu

- 24 V LED strips flexible and cuttable
- Up to 60,000 h L90/B10 with SDT technology, tested acc. to IEC 62717 on real LED strips
- Adjustable color temp. via Tunable White: 2200...3500 K, 2500...4000 K, 2700...5700 K CRI90
- Adjustable color temp. via Tunable White: 2200...3500 K, 2500...3500 K, 2700...6500 K CRI80
- CRI80, CRI90 options available
- Stable light flux over length: active constant current regulators (ICs), PWM safe
- Embedded automatic quick protection against accidental miswiring up to 25 V
- Fully PWM dimmable from zero up to 2.5 kHz, audible noise free, suitable for quite places
- Designed, engineered and manufactured and tested in Italy (ISO9001, ISO 17025, ACCREDIA, VDE)

Korzyści ze stosowania produktu

- Color uniformity better than 3 SDCM on the entire LED strip and between strips
- LED lifetime acc.to IES LM-80 and IES TM-21 standards, and also internal OSRAM LAB tests
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Łatwy montaż na wielu delikatnych powierzchniach dzięki taśmie samoprzylepnej z tyłu
- Wyjątkowe wzornictwo i wysoka jakość materiałów
- Pre-soldered wires

Obszar zastosowań

- Oświetlenie faset
- Oświetlenie sklepowe
- Biura



Dane techniczne


Dane elektryczne

Napięcie nominalne	24,0 V
Rodzaj prądu	DC
Nominalna moc na metr	9,8 W
Moc znamionowa	88,40 W
Zakres napięcia wejściowego	23...25 V
Accidental reverse input voltage protection up to	25 V

Dane fotometryczne

Barwa światła LED	Dynamic White
Temperatura barwowa	2700...5700 K
Ogólny wskaźnik oddawania barw Ra	90
Strumień świetlny na metr	1156 lm
Skuteczność świetlna	118 lm/W
Standardowe odchylenie dopasowania barw	≤3 sdc
Barwa światła (oznaczenie)	2700...5700 K
Temperatura barwowa	3800 K

Wymiary i waga

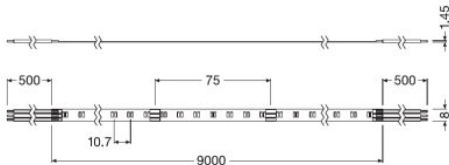

Długość	9000,0 mm
Długość przewodów	500,0
Masa produktu	104,00 g
Przekrój przewodu, strona wejściowa	0,5 mm ²
Szerokość	8,00 mm
Wysokość	1,40 mm

Temperatury i warunki pracy

Karta katalogowa produktu

Zakres temperatury pracy	-20...+85 °C ¹⁾
Zakres temperatury magazynowania	-40...85 °C

¹⁾ Exceeding the maximum ratings will reduce expected life time or destroy the LED strip.

Dodatkowe dane produktu

Produkt zastępczy EAN	4062172032667, 4062172032643
ID of contained light source [AGGR]	LS_TRV_286063

Certyfikaty i Normy

Normy	CE/ENEC/EAC
Energy efficiency class of the contained light source	F

Dane logistyczne

Kod taryfy celnej	85395100000
-------------------	-------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	09-06-2023
Primary Article Identifier	4062172189293
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	1e4aef2d-5fd2-4940-9779-142c985ead14

Wyposażenie / Akcesoria

- Uprozczone połączenie z dopasowanym systemem CONNECTsystem jako opcja
- Perfectly matched with OTi DALI 50/80 4CH DT6/8 and OTi DALI 160 2CH DT6/8
- Perfectly matched with OTi BLE 80/220-240/24 4CH

Karta katalogowa, teks

- not relevant
- not relevant
- not relevant
- Avoid installations in rural and urban areas with high industrial activity and heavy traffic (higher than class than 4C1 according IEC 60721-3) and as well as installation in spa, areas with chlorine atmosphere, direct exposure to blown sand.

Pobierz dane

Karta katalogowa produktu

Plik	
	User instruction LINEARlight FLEX, Tunable White
	Product Datasheet LINEARlight Flex Tunable White CRI90 Specification Sheet (EN)
	Broszury Light is freedom of design (EN)
	Certyfikaty VDE ENEC CERTIFICATE 40052516 160823
	Certyfikaty LF(P) TW G5 CB 180121
	Deklaracje zgodności LR FLEX TW2 CE 4249165 02 020823
	Eulumdat LF1100TW-G5-927.957-09 L2 LTD 130421
	IES data LF1100TW-G5-927.957-09 L2 IES 130421

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Dane logistyczne

Kod produktu	Opis produktu	Opakowanie (liczba produktów / opakowanie)	Wymiary (długość x szerokość x wysokość)	Objętość	Waga brutto
4062172189293	LF1100TW-G5 -927.957-09 L2	Karton wysyłkowy 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1765.00 g

Karta katalogowa produktu

Dane logistyczne

Wymieniony kod produktu oznacza najmniejszą ilość produktu, jaka może być zamówiona. Jednostka transportowa może zawierać jedną sztukę lub więcej. Składając zamówienie prosimy o zamawianie ilości odpowiadających jednej lub wielokrotności jednostki transportowej.

Akcesoria opcjonalne

Opis produktu	Nazwa akcesorium	Kod akcesorium
LF1100TW-G5 -927.957-09 L2	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF1100TW-G5 -927.957-09 L2	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF1100TW-G5 -927.957-09 L2	CONN-FLEX -3P-050 KIT 10PCS	▶ 4062172179690
LF1100TW-G5 -927.957-09 L2	CONN-FLEX -3P-200 KIT 10PCS	▶ 4062172179720
LF1100TW-G5 -927.957-09 L2	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF1100TW-G5 -927.957-09 L2	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
LF1100TW-G5 -927.957-09 L2	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF1100TW-G5 -927.957-09 L2	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF1100TW-G5 -927.957-09 L2	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF1100TW-G5 -927.957-09 L2	FX -SC08-G2-CT4PJ	▶ 4052899464858
LF1100TW-G5 -927.957-09 L2	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046

Oświadczenie

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.