

PrevaLED BRICK HP

LED modules for industry and outdoor applications



Cechy produktu

- Module efficacy: up to 186 lm/W
- Available with color temperature: 2,200 K, 2,700 K, 3,000 K, 4,000 K, 5,700 K and 6,500 K
- Stopień ochrony: IP20

Obszar zastosowań

- Oświetlenie drogowe
- Przemysł
- Oświetlenie przestrzeni



Karta katalogowa rodziny produktów

Dane techniczne

Opis produktu	Dane elektryczne				Dane fotometryczne
	Prąd znamionowy	Rodzaj prądu	Energy consumption in on-mode [AGGR]	On-mode power	Skuteczność świetlna
PL-BRICK HP 1000 722 2X2	0,7 A	DC	8.0 kWh/1000h	8.00 W	133 lm/W
PL-BRICK HP 1000 725 2X2	0,7 A	DC	8.0 kWh/1000h	8.00 W	138 lm/W
PL-BRICK HP 1000 727 2X2	0,7 A	DC	8.0 kWh/1000h	8.00 W	148 lm/W
PL-BRICK HP 1000 730 2X2	0,7 A	DC	8.1 kWh/1000h	8.10 W	163 lm/W
PL-BRICK HP 1000 740 2X2	0,7 A	DC	8.2 kWh/1000h	8.20 W	173 lm/W
PL-BRICK HP 1000 757 2X2	0,7 A	DC	8.1 kWh/1000h	8.10 W	173 lm/W
PL-BRICK HP 1000 765 2X2	0,7 A	DC	8.1 kWh/1000h	8.10 W	170 lm/W
PL-BRICK HP 1000 827 2X2	0,7 A	DC	8.0 kWh/1000h	8.00 W	141 lm/W
PL-BRICK HP 1000 830 2X2	0,7 A	DC	8.0 kWh/1000h	8.00 W	146 lm/W
PL-BRICK HP 1000 840 2X2	0,7 A	DC	8.1 kWh/1000h	8.10 W	156 lm/W
PL-BRICK HP 1900 722 2X4	0,7 A	DC	16.0 kWh/1000h	16.00 W	133 lm/W
PL-BRICK HP 1900 725 2X4	0,7 A	DC	15.9 kWh/1000h	15.90 W	138 lm/W
PL-BRICK HP 1900 727 2X4	0,7 A	DC	16.0 kWh/1000h	16.00 W	148 lm/W
PL-BRICK HP 1900 730 2X4	0,7 A	DC	16.0 kWh/1000h	16.00 W	163 lm/W
PL-BRICK HP 1900 740 2X4	0,7 A	DC	16.0 kWh/1000h	16.00 W	173 lm/W
PL-BRICK HP 1900 757 2X4	0,7 A	DC	16.0 kWh/1000h	16.00 W	173 lm/W
PL-BRICK HP 1900 765 2X4	0,7 A	DC	16.1 kWh/1000h	16.10 W	175 lm/W
PL-BRICK HP 1900 827 2X4	0,7 A	DC	16.0 kWh/1000h	16.00 W	145 lm/W
PL-BRICK HP 1900 840 2X4	0,7 A	DC	16.0 kWh/1000h	16.00 W	156 lm/W
PL-BRICK HP 2850 722 2X6	0,7 A	DC	24.0 kWh/1000h	24.00 W	133 lm/W
PL-BRICK HP 2850 725 2X6	0,7 A	DC	23.8 kWh/1000h	23.80 W	138 lm/W
PL-BRICK HP 2850 727 2X6	0,7 A	DC	24.1 kWh/1000h	24.10 W	148 lm/W
PL-BRICK HP 2850 730 2X6	0,7 A	DC	23.9 kWh/1000h	23.90 W	163 lm/W
PL-BRICK HP 2850 740 2X6	0,7 A	DC	24.0 kWh/1000h	24.00 W	173 lm/W
PL-BRICK HP 2850 757 2X6	0,7 A	DC	24.0 kWh/1000h	24.00 W	173 lm/W
PL-BRICK HP 2850 765 2X6	0,7 A	DC	24.1 kWh/1000h	24.10 W	170 lm/W
PL-BRICK HP 2850 827 2X6	0,7 A	DC	23.9 kWh/1000h	23.90 W	145 lm/W
PL-BRICK HP 2850 830 2X6	0,7 A	DC	23.8 kWh/1000h	23.80 W	146 lm/W
PL-BRICK HP 2850 840 2X6	0,7 A	DC	23.9 kWh/1000h	23.90 W	156 lm/W
PL-BRICK HP 3800 722 2X8	0,7 A	DC	32.1 kWh/1000h	32.10 W	133 lm/W
PL-BRICK HP 3800 725 2X8	0,7 A	DC	31.8 kWh/1000h	31.80 W	138 lm/W
PL-BRICK HP 3800 727 2X8	0,7 A	DC	32.1 kWh/1000h	32.10 W	148 lm/W
PL-BRICK HP 3800 730 2X8	0,7 A	DC	31.9 kWh/1000h	31.90 W	163 lm/W
PL-BRICK HP 3800 740 2X8	0,7 A	DC	32.0 kWh/1000h	32.00 W	173 lm/W
PL-BRICK HP 3800 757 2X8	0,7 A	DC	32.0 kWh/1000h	32.00 W	173 lm/W
PL-BRICK HP 3800 765 2X8	0,7 A	DC	32.2 kWh/1000h	32.20 W	170 lm/W
PL-BRICK HP 3800 827 2X8	0,7 A	DC	31.8 kWh/1000h	31.80 W	145 lm/W
PL-BRICK HP 3800 840 2X8	0,7 A	DC	32.0 kWh/1000h	32.00 W	156 lm/W

Karta katalogowa rodziny produktów

					Dane świetlne
Opis produktu	Useful luminous flux (Φuse) [AGGR]	Correlated color temperature CCT [AGGR]	Ogólny wskaźnik oddawania barw Ra	Colour consistency (McAdam ellipses) [AGGR]	Kąt rozsyłu światła
PL-BRICK HP 1000 722 2X2	1031 lm	2200 K	70	5	120 °
PL-BRICK HP 1000 725 2X2	1103 lm	2500 K	72	5	120 °
PL-BRICK HP 1000 727 2X2	1125 lm	2700 K	70	5	120 °
PL-BRICK HP 1000 730 2X2	1269 lm	3000 K	70	5	120 °
PL-BRICK HP 1000 740 2X2	1336 lm	4000 K	70	5	120 °
PL-BRICK HP 1000 757 2X2	1318 lm	5700 K	69	5	120 °
PL-BRICK HP 1000 765 2X2	1320 lm	6500 K	70	5	120 °
PL-BRICK HP 1000 827 2X2	1093 lm	2700 K	80	5	120 °
PL-BRICK HP 1000 830 2X2	1129 lm	3000 K	82	5	120 °
PL-BRICK HP 1000 840 2X2	1163 lm	4000 K	82	5	120 °
PL-BRICK HP 1900 722 2X4	2036 lm	2200 K	70	5	120 °
PL-BRICK HP 1900 725 2X4	2111 lm	2500 K	72	5	120 °
PL-BRICK HP 1900 727 2X4	2350 lm	2700 K	70	5	120 °
PL-BRICK HP 1900 730 2X4	2506 lm	3000 K	70	5	120 °
PL-BRICK HP 1900 740 2X4	2663 lm	4000 K	70	5	120 °
PL-BRICK HP 1900 757 2X4	2663 lm	5700 K	69	5	120 °
PL-BRICK HP 1900 765 2X4	2580 lm	6500 K	70	5	120 °
PL-BRICK HP 1900 827 2X4	2153 lm	2700 K	80	5	120 °
PL-BRICK HP 1900 840 2X4	2388 lm	4000 K	80	5	120 °
PL-BRICK HP 2850 722 2X6	3054 lm	2200 K	70	5	120 °
PL-BRICK HP 2850 725 2X6	3167 lm	2500 K	72	5	120 °
PL-BRICK HP 2850 727 2X6	3524 lm	2700 K	70	5	120 °
PL-BRICK HP 2850 730 2X6	3759 lm	3000 K	70	5	120 °
PL-BRICK HP 2850 740 2X6	3994 lm	4000 K	70	5	120 °
PL-BRICK HP 2850 757 2X6	3994 lm	5700 K	69	5	120 °
PL-BRICK HP 2850 765 2X6	3850 lm	6500 K	70	5	120 °
PL-BRICK HP 2850 827 2X6	3218 lm	2700 K	80	5	120 °
PL-BRICK HP 2850 830 2X6	3462 lm	3000 K	80	5	120 °
PL-BRICK HP 2850 840 2X6	3566 lm	4000 K	80	5	120 °
PL-BRICK HP 3800 722 2X8	4073 lm	2200 K	70	5	120 °
PL-BRICK HP 3800 725 2X8	4044 lm	2500 K	72	5	120 °
PL-BRICK HP 3800 727 2X8	4699 lm	2700 K	70	5	120 °
PL-BRICK HP 3800 730 2X8	5002 lm	3000 K	70	5	120 °
PL-BRICK HP 3800 740 2X8	5306 lm	4000 K	70	5	120 °
PL-BRICK HP 3800 757 2X8	5326 lm	5700 K	70	5	120 °
PL-BRICK HP 3800 765 2X8	5169 lm	6500 K	70	5	120 °
PL-BRICK HP 3800 827 2X8	4268 lm	2700 K	80	5	120 °
PL-BRICK HP 3800 840 2X8	4775 lm	4000 K	80	5	120 °

Karta katalogowa rodziny produktów

Opis produktu	Dane o module LED	Wymiary i waga			
	Liczba LED w module	Masa produktu	Width EPREL [AGGR]	Length EPREL [AGGR]	Height EPREL [AGGR]
PL-BRICK HP 1000 722 2X2	4	15,00 g	50.0 mm	70.0 mm	6.0 mm
PL-BRICK HP 1000 725 2X2	4	15,00 g	50.0 mm	70.0 mm	6.0 mm
PL-BRICK HP 1000 727 2X2	4	15,00 g	50.0 mm	70.0 mm	6.0 mm
PL-BRICK HP 1000 730 2X2	4	15,00 g	50.0 mm	70.0 mm	6.1 mm
PL-BRICK HP 1000 740 2X2	4	15,00 g	50.0 mm	70.0 mm	6.0 mm
PL-BRICK HP 1000 757 2X2	4	15,00 g	50.0 mm	70.0 mm	6.0 mm
PL-BRICK HP 1000 765 2X2	4	15,00 g	50.0 mm	70.0 mm	6.0 mm
PL-BRICK HP 1000 827 2X2	4	15,00 g	50.0 mm	70.0 mm	6.1 mm
PL-BRICK HP 1000 830 2X2	4	15,00 g	50.0 mm	70.0 mm	6.0 mm
PL-BRICK HP 1000 840 2X2	4	15,00 g	50.0 mm	70.0 mm	6.0 mm
PL-BRICK HP 1900 722 2X4	8	27,00 g	50.0 mm	121.0 mm	8.0 mm
PL-BRICK HP 1900 725 2X4	8	27,00 g	49.5 mm	121.4 mm	6.0 mm
PL-BRICK HP 1900 727 2X4	8	27,00 g	50.0 mm	121.0 mm	8.0 mm
PL-BRICK HP 1900 730 2X4	8	2700 g	50.0 mm	121.0 mm	8.0 mm
PL-BRICK HP 1900 740 2X4	8	27,00 g	50.0 mm	121.0 mm	8.0 mm
PL-BRICK HP 1900 757 2X4	8	27,00 g	50.0 mm	121.0 mm	8.0 mm
PL-BRICK HP 1900 765 2X4	8	27,00 g	49.5 mm	121.4 mm	6.0 mm
PL-BRICK HP 1900 827 2X4	8	27,00 g	49.5 mm	121.4 mm	6.1 mm
PL-BRICK HP 1900 840 2X4	8	27,00 g	50.0 mm	121.0 mm	8.0 mm
PL-BRICK HP 2850 722 2X6	12	40,00 g	50.0 mm	172.0 mm	8.0 mm
PL-BRICK HP 2850 725 2X6	12	40,00 g	49.5 mm	172.2 mm	6.0 mm
PL-BRICK HP 2850 727 2X6	12	40,00 g	50.0 mm	172.0 mm	8.0 mm
PL-BRICK HP 2850 730 2X6	12	40,00 g	50.0 mm	172.0 mm	8.0 mm
PL-BRICK HP 2850 740 2X6	12	40,00 g	50.0 mm	172.0 mm	8.0 mm
PL-BRICK HP 2850 757 2X6	12	40,00 g	50.0 mm	172.0 mm	8.0 mm
PL-BRICK HP 2850 765 2X6	12	40,00 g	49.5 mm	172.2 mm	6.0 mm
PL-BRICK HP 2850 827 2X6	12	40,00 g	49.5 mm	172.2 mm	6.1 mm
PL-BRICK HP 2850 830 2X6	12	40,00 g	50.0 mm	172.0 mm	6.0 mm
PL-BRICK HP 2850 840 2X6	12	40,00 g	50.0 mm	172.0 mm	8.0 mm
PL-BRICK HP 3800 722 2X8	16	5000 g	50.0 mm	224.0 mm	8.0 mm
PL-BRICK HP 3800 725 2X8	16	50,00 g	49.5 mm	223.5 mm	6.0 mm
PL-BRICK HP 3800 727 2X8	16	50,00 g	50.0 mm	224.0 mm	8.0 mm
PL-BRICK HP 3800 730 2X8	16	5000 g	50.0 mm	224.0 mm	8.0 mm
PL-BRICK HP 3800 740 2X8	16	5000 g	50.0 mm	224.0 mm	8.0 mm
PL-BRICK HP 3800 757 2X8	16	5000 g	50.0 mm	224.0 mm	8.0 mm
PL-BRICK HP 3800 765 2X8	16	50,00 g	49.5 mm	223.5 mm	6.0 mm
PL-BRICK HP 3800 827 2X8	16	50,00 g	49.5 mm	223.5 mm	6.1 mm
PL-BRICK HP 3800 840 2X8	16	5000 g	50.0 mm	224.0 mm	8.0 mm

Opis produktu	Temperatury i warunki pracy	Trwałość		Dodatkowe dane produktu
	Zakres temperatury magazynowania	Lumen maintenance factor LMF [AGGR]	L70B50 lifetime [AGGR]	Lighting technology used [AGGR]
PL-BRICK HP 1000 722 2X2	-30...85 °C	96	50000 h	LED

Karta katalogowa rodziny produktów

Opis produktu	Temperatury i warunki pracy	Trwałość		Dodatkowe dane produktu
	Zakres temperatury magazynowania	Lumen maintenance factor LMF [AGGR]	L70B50 lifetime [AGGR]	Lighting technology used [AGGR]
PL-BRICK HP 1000 725 2X2	-30...85 °C	96	100000 h	LED
PL-BRICK HP 1000 727 2X2	-30...85 °C	96	50000 h	LED
PL-BRICK HP 1000 730 2X2	-30...85 °C	96	50000 h	LED
PL-BRICK HP 1000 740 2X2	-30...85 °C	96	50000 h	LED
PL-BRICK HP 1000 757 2X2	-30...85 °C	96	50000 h	LED
PL-BRICK HP 1000 765 2X2	-30...85 °C	96	100000 h	LED
PL-BRICK HP 1000 827 2X2	-30...85 °C	96	100000 h	LED
PL-BRICK HP 1000 830 2X2	-30...85 °C	96	50000 h	LED
PL-BRICK HP 1000 840 2X2	-30...85 °C	96	50000 h	LED
PL-BRICK HP 1900 722 2X4	-30...85 °C	96	100000 h	LED
PL-BRICK HP 1900 725 2X4	-30...85 °C	96	100000 h	LED
PL-BRICK HP 1900 727 2X4	-30...85 °C	96	100000 h	LED
PL-BRICK HP 1900 730 2X4	-30...85 °C	96	100000 h	LED
PL-BRICK HP 1900 740 2X4	-30...85 °C	96	100000 h	LED
PL-BRICK HP 1900 757 2X4	-30...85 °C	96	100000 h	LED
PL-BRICK HP 1900 765 2X4	-30...85 °C	96	100000 h	LED
PL-BRICK HP 1900 827 2X4	-30...85 °C	96	100000 h	LED
PL-BRICK HP 1900 840 2X4	-30...85 °C	96	100000 h	LED
PL-BRICK HP 2850 722 2X6	-30...85 °C	96	100000 h	LED
PL-BRICK HP 2850 725 2X6	-30...85 °C	96	100000 h	LED
PL-BRICK HP 2850 727 2X6	-30...85 °C	96	100000 h	LED
PL-BRICK HP 2850 730 2X6	-30...85 °C	96	100000 h	LED
PL-BRICK HP 2850 740 2X6	-30...85 °C	96	100000 h	LED
PL-BRICK HP 2850 757 2X6	-30...85 °C	96	100000 h	LED
PL-BRICK HP 2850 765 2X6	-30...85 °C	96	100000 h	LED
PL-BRICK HP 2850 827 2X6	-30...85 °C	96	100000 h	LED
PL-BRICK HP 2850 830 2X6	-30...85 °C	96	100000 h	LED
PL-BRICK HP 2850 840 2X6	-30...85 °C	96	100000 h	LED
PL-BRICK HP 3800 722 2X8	-30...85 °C	96	100000 h	LED
PL-BRICK HP 3800 725 2X8	-30...85 °C	96		LED
PL-BRICK HP 3800 727 2X8	-30...85 °C	96		LED
PL-BRICK HP 3800 730 2X8	-30...85 °C	96	100000 h	LED
PL-BRICK HP 3800 740 2X8	-30...85 °C	96	100000 h	LED
PL-BRICK HP 3800 757 2X8	-30...85 °C	96	100000 h	LED
PL-BRICK HP 3800 765 2X8	-30...85 °C	96	100000 h	LED
PL-BRICK HP 3800 827 2X8	-30...85 °C	96	100000 h	LED
PL-BRICK HP 3800 840 2X8	-30...85 °C	96	100000 h	LED

Opis produktu	Możliwości	Certyfikaty i Normy		
	Ściemnianie	Typ zabezpieczenia	Normy	Energy efficiency class [AGGR]
PL-BRICK HP 1000 722 2X2	Tak	IP20	CE/ENEC	E
PL-BRICK HP 1000 725 2X2	Tak	IP20	CE/ENEC	E

Karta katalogowa rodziny produktów

Opis produktu	Możliwości	Certyfikaty i Normy		
	Ściemnianie	Typ zabezpieczenia	Normy	Energy efficiency class [AGGR]
PL-BRICK HP 1000 727 2X2	Tak	IP20	CE/ENEC	E
PL-BRICK HP 1000 730 2X2	Tak	IP20	CE/ENEC	D
PL-BRICK HP 1000 740 2X2	Tak	IP20	CE/ENEC	D
PL-BRICK HP 1000 757 2X2	Tak	IP20	CE/ENEC	D
PL-BRICK HP 1000 765 2X2	Tak	IP20	CE/ENEC	D
PL-BRICK HP 1000 827 2X2	Tak	IP20	CE/ENEC	E
PL-BRICK HP 1000 830 2X2	Tak	IP20	CE/ENEC	E
PL-BRICK HP 1000 840 2X2	Tak	IP20	CE/ENEC	E
PL-BRICK HP 1900 722 2X4		IP20	CE/ENEC	E
PL-BRICK HP 1900 725 2X4	Tak	IP20	CE/ENEC	E
PL-BRICK HP 1900 727 2X4		IP20	CE/ENEC	D
PL-BRICK HP 1900 730 2X4		IP20	CE/ENEC	D
PL-BRICK HP 1900 740 2X4		IP20	CE/ENEC	D
PL-BRICK HP 1900 757 2X4	Tak	IP20	CE/ENEC	D
PL-BRICK HP 1900 765 2X4	Tak	IP20	CE/ENEC	D
PL-BRICK HP 1900 827 2X4	Tak	IP20	CE/ENEC	E
PL-BRICK HP 1900 840 2X4		IP20	CE/ENEC	D
PL-BRICK HP 2850 722 2X6		IP20	CE/ENEC	E
PL-BRICK HP 2850 725 2X6	Tak	IP20	CE/ENEC	E
PL-BRICK HP 2850 727 2X6		IP20	CE/ENEC	D
PL-BRICK HP 2850 730 2X6		IP20	CE/ENEC	D
PL-BRICK HP 2850 740 2X6		IP20	CE/ENEC	D
PL-BRICK HP 2850 757 2X6	Tak	IP20	CE/ENEC	D
PL-BRICK HP 2850 765 2X6	Tak	IP20	CE/ENEC	D
PL-BRICK HP 2850 827 2X6	Tak	IP20	CE/ENEC	E
PL-BRICK HP 2850 830 2X6	Tak	IP20	CE/ENEC	E
PL-BRICK HP 2850 840 2X6		IP20	CE/ENEC	D
PL-BRICK HP 3800 722 2X8		IP20	CE/ENEC	E
PL-BRICK HP 3800 725 2X8		IP20	CE/ENEC	E
PL-BRICK HP 3800 727 2X8		IP20	CE/ENEC	D
PL-BRICK HP 3800 730 2X8		IP20	CE/ENEC	D
PL-BRICK HP 3800 740 2X8		IP20	CE/ENEC	D
PL-BRICK HP 3800 757 2X8		IP20	CE/ENEC	D
PL-BRICK HP 3800 765 2X8	Tak	IP20	CE/ENEC	D
PL-BRICK HP 3800 827 2X8	Tak	IP20	CE/ENEC	E
PL-BRICK HP 3800 840 2X8		IP20	CE/ENEC	D

Opis produktu	Dane logistyczne	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)		
	Kod taryfy celnej	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
PL-BRICK HP 1000 722 2X2	85395100000	22-09-2023	4062172223294	No declarable substances contained

Karta katalogowa rodziny produktów

	Dane logistyczne	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)		
Opis produktu	Kod taryfy celnej	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
PL-BRICK HP 1000 725 2X2	85395100000	22-09-2023	4062172248686	No declarable substances contained
PL-BRICK HP 1000 727 2X2	85395100000	22-09-2023	4062172223317	No declarable substances contained
PL-BRICK HP 1000 730 2X2	85395100000	22-09-2023	4062172223331	No declarable substances contained
PL-BRICK HP 1000 740 2X2	85395100000	22-09-2023	4062172213219	No declarable substances contained
PL-BRICK HP 1000 757 2X2	85395100000	22-09-2023	4062172248723	No declarable substances contained
PL-BRICK HP 1000 765 2X2	85395100000	22-09-2023	4062172248747	No declarable substances contained
PL-BRICK HP 1000 827 2X2	85395100000	22-09-2023	4062172223355	No declarable substances contained
PL-BRICK HP 1000 830 2X2	85395100000	22-09-2023	4062172213196	No declarable substances contained
PL-BRICK HP 1000 840 2X2	85395100000	22-09-2023	4062172213370	No declarable substances contained
PL-BRICK HP 1900 722 2X4	85395100000	22-09-2023	4062172036238	No declarable substances contained
PL-BRICK HP 1900 725 2X4	85395100000	22-09-2023	4062172248785	No declarable substances contained
PL-BRICK HP 1900 727 2X4	85395100000	22-09-2023	4062172036252	No declarable substances contained
PL-BRICK HP 1900 730 2X4	85395100000	07-11-2022	4052899597211	No declarable substances contained
PL-BRICK HP 1900 740 2X4	85395100000	07-11-2022	4052899597235	No declarable substances contained
PL-BRICK HP 1900 757 2X4	85395100000	22-09-2023	4062172169134	No declarable substances contained
PL-BRICK HP 1900 765 2X4	85395100000	22-09-2023	4062172248808	No declarable substances contained
PL-BRICK HP 1900 827 2X4	85395100000	22-09-2023	4062172223386	No declarable substances contained
PL-BRICK HP 1900 840 2X4	85395100000	07-11-2022	4052899597259	No declarable substances contained
PL-BRICK HP 2850 722 2X6	85395100000	07-11-2022	4062172036191	No declarable substances contained
PL-BRICK HP 2850 725 2X6	85395100000	22-09-2023	4062172248822	No declarable substances contained
PL-BRICK HP 2850 727 2X6	85395100000	07-11-2022	4062172036214	No declarable substances contained
PL-BRICK HP 2850 730 2X6	85395100000	07-11-2022	4062172028189	No declarable substances contained
PL-BRICK HP 2850 740 2X6	85395100000	07-11-2022	4062172028202	No declarable substances contained
PL-BRICK HP 2850 757 2X6	85395100000	14-12-2022	4062172169158	No declarable substances contained

Karta katalogowa rodziny produktów

	Dane logistyczne	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)		
Opis produktu	Kod taryfy celnej	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
PL-BRICK HP 2850 765 2X6	85395100000	22-09-2023	4062172248846	No declarable substances contained
PL-BRICK HP 2850 827 2X6	85395100000	22-09-2023	4062172223416	No declarable substances contained
PL-BRICK HP 2850 830 2X6	85395100000	07-11-2022	4062172204569	No declarable substances contained
PL-BRICK HP 2850 840 2X6	85395100000	22-09-2023	4062172028226	No declarable substances contained
PL-BRICK HP 3800 722 2X8	85395100000	22-09-2023	4062172036153	No declarable substances contained
PL-BRICK HP 3800 725 2X8	85395100000	14-03-2023	4062172062480	No declarable substances contained
PL-BRICK HP 3800 727 2X8	85395100000	22-09-2023	4062172036177	No declarable substances contained
PL-BRICK HP 3800 730 2X8	85395100000	07-11-2022	4052899576292	No declarable substances contained
PL-BRICK HP 3800 740 2X8	85395100000	07-11-2022	4052899576315	No declarable substances contained
PL-BRICK HP 3800 757 2X8	85395100000	22-09-2023	4062172011068	No declarable substances contained
PL-BRICK HP 3800 765 2X8	85395100000	28-09-2023	4062172241588	No declarable substances contained
PL-BRICK HP 3800 827 2X8	85395100000	28-09-2023	4062172223430	No declarable substances contained
PL-BRICK HP 3800 840 2X8	85395100000	07-11-2022	4052899576339	No declarable substances contained


Opis produktu	Declaration No. in SCIP database
PL-BRICK HP 1000 722 2X2	No declarable substances contained
PL-BRICK HP 1000 725 2X2	No declarable substances contained
PL-BRICK HP 1000 727 2X2	No declarable substances contained
PL-BRICK HP 1000 730 2X2	No declarable substances contained
PL-BRICK HP 1000 740 2X2	No declarable substances contained
PL-BRICK HP 1000 757 2X2	No declarable substances contained
PL-BRICK HP 1000 765 2X2	No declarable substances contained
PL-BRICK HP 1000 827 2X2	No declarable substances contained

Karta katalogowa rodziny produktów


Opis produktu	Declaration No. in SCIP database
PL-BRICK HP 1000 830 2X2	No declarable substances contained
PL-BRICK HP 1000 840 2X2	No declarable substances contained
PL-BRICK HP 1900 722 2X4	No declarable substances contained
PL-BRICK HP 1900 725 2X4	No declarable substances contained
PL-BRICK HP 1900 727 2X4	No declarable substances contained
PL-BRICK HP 1900 730 2X4	No declarable substances contained
PL-BRICK HP 1900 740 2X4	No declarable substances contained
PL-BRICK HP 1900 757 2X4	No declarable substances contained
PL-BRICK HP 1900 765 2X4	No declarable substances contained
PL-BRICK HP 1900 827 2X4	No declarable substances contained
PL-BRICK HP 1900 840 2X4	No declarable substances contained
PL-BRICK HP 2850 722 2X6	No declarable substances contained
PL-BRICK HP 2850 725 2X6	No declarable substances contained
PL-BRICK HP 2850 727 2X6	No declarable substances contained
PL-BRICK HP 2850 730 2X6	No declarable substances contained
PL-BRICK HP 2850 740 2X6	No declarable substances contained
PL-BRICK HP 2850 757 2X6	No declarable substances contained
PL-BRICK HP 2850 765 2X6	No declarable substances contained
PL-BRICK HP 2850 827 2X6	No declarable substances contained
PL-BRICK HP 2850 830 2X6	No declarable substances contained
PL-BRICK HP 2850 840 2X6	No declarable substances contained
PL-BRICK HP 3800 722 2X8	No declarable substances contained
PL-BRICK HP 3800 725 2X8	No declarable substances contained
PL-BRICK HP 3800 727 2X8	No declarable substances contained

Karta katalogowa rodziny produktów


Opis produktu	Declaration No. in SCIP database
PL-BRICK HP 3800 730 2X8	No declarable substances contained
PL-BRICK HP 3800 740 2X8	No declarable substances contained
PL-BRICK HP 3800 757 2X8	No declarable substances contained
PL-BRICK HP 3800 765 2X8	No declarable substances contained
PL-BRICK HP 3800 827 2X8	No declarable substances contained
PL-BRICK HP 3800 840 2X8	No declarable substances contained




PrevaLED BRICK HP 1000 2x2 Product line drawing




PrevaLED BRICK HP 1000 2x2 Product line drawing

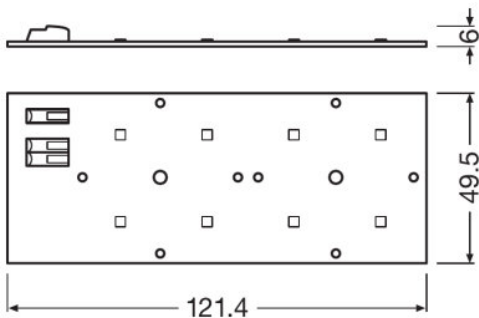


PL-BRICK HP 1900 730 740 840

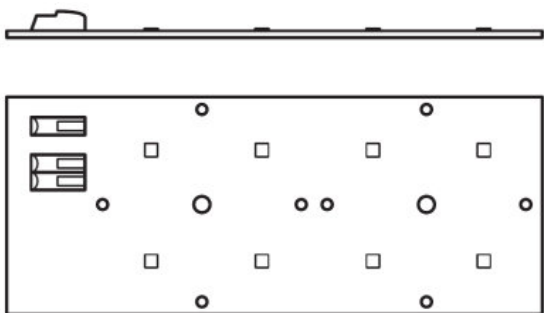

PL-BRICK HP 1900 730 740 840

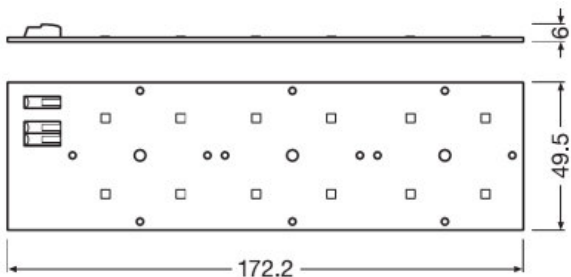


PL-BRICK HP 2850 2X6

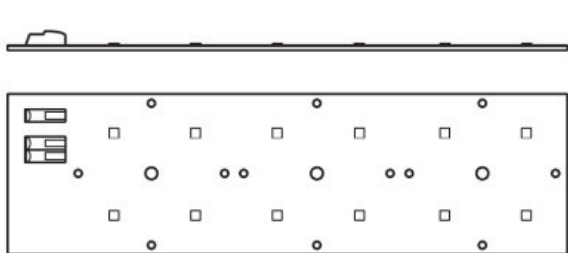


PL-BRICK HP 2850 2X6

Karta katalogowa rodziny produktów

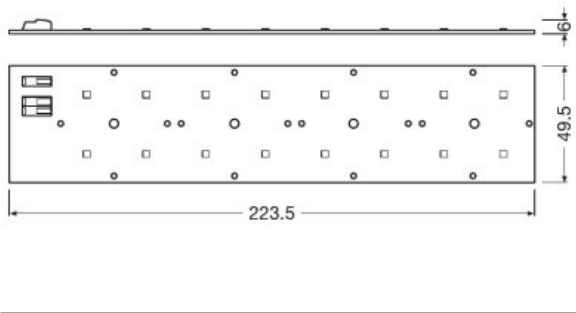

PL-BRICK HP 3800 730 740 840

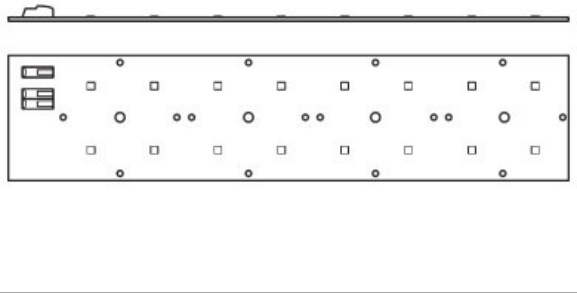

PL-BRICK HP 3800 730 740 840

Wskazówki dotyczące zastosowania

Więcej szczegółowych informacji dotyczących grafik i zastosowania znajduje się w karcie katalogowej produktu

Sprzedaż i pomoc techniczna

Sprzedaż i pomoc techniczna www.osram.com

Pobierz dane

Plik	
	Certyfikaty PL BRICK BA BAR CLE VDE ENEC 40045382 210723
	Dane CAD PL BRICK HP 1000 CAD DWG 300622
	Dane CAD PL BRICK HP 1000 CAD STEP 300622
	Dane CAD 2-dim PL BRICK HP 1000 CAD 2DIM 300622
	Dane CAD 3-dim PL BRICK HP 1000 CAD 3DIM 300622
	Dane CAD PL BRICK HP 1900 CAD STEP 300622
	Dane CAD PL BRICK HP 1900 CAD DWG 300622
	Dane CAD 2-dim PL BRICK HP 1900 CAD 2DIM 300622
	Dane CAD 3-dim PL BRICK HP 1900 CAD 3DIM 300622

Karta katalogowa rodziny produktów

	Deklaracje zgodności PL BRICK DA HP CE 3637355 190623
	Dane CAD PL BRICK HP 2850 CAD DWG 300622
	Dane CAD PL BRICK HP 2850 CAD STEP 300622
	Dane CAD 2-dim PL BRICK HP 2850 CAD 2DIM 300622
	Dane CAD 3-dim PL BRICK HP 2850 CAD 3DIM 300622
	Dane CAD PL BRICK HP 3800 CAD DWG 300622
	Dane CAD PL BRICK HP 3800 CAD STEP 300622
	Dane CAD 2-dim PL BRICK HP 2850 CAD 2DIM 300622
	Dane CAD 3-dim PL BRICK HP 3800 CAD 3DIM 300622
	Certyfikaty PL BRICK 3800 COC UL 4195924 280222

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Dane logistyczne

Kod produktu	Opis produktu	Opakowanie (liczba produktów / opakowanie)	Wymiary (długość x szerokość x wysokość)	Objętość	Waga brutto
4062172223294	PL-BRICK HP 1000 722 2X2	Karton wysyłkowy 120	345 mm x 177 mm x 147 mm	8.98 dm ³	2087.00 g
4062172224866	PL-BRICK HP 1000 725 2X2	Karton wysyłkowy 120	345 mm x 177 mm x 147 mm	8.98 dm ³	2087.00 g
4062172223317	PL-BRICK HP 1000 727 2X2	Karton wysyłkowy 120	345 mm x 177 mm x 147 mm	8.98 dm ³	2087.00 g
4062172223331	PL-BRICK HP 1000 730 2X2	Karton wysyłkowy 120	345 mm x 177 mm x 147 mm	8.98 dm ³	2087.00 g
4062172213219	PL-BRICK HP 1000 740 2X2	Karton wysyłkowy 120	345 mm x 177 mm x 147 mm	8.98 dm ³	2087.00 g

Karta katalogowa rodziny produktów

Dane logistyczne

4062172248723	PL-BRICK HP 1000 757 2X2	Karton wysyłkowy 120	345 mm x 177 mm x 147 mm	8.98 dm ³	2087.00 g
4062172248747	PL-BRICK HP 1000 765 2X2	Karton wysyłkowy 120	345 mm x 177 mm x 147 mm	8.98 dm ³	2087.00 g
4062172223355	PL-BRICK HP 1000 827 2X2	Karton wysyłkowy 120	345 mm x 177 mm x 147 mm	8.98 dm ³	2087.00 g
4062172213196	PL-BRICK HP 1000 830 2X2	Karton wysyłkowy 120	345 mm x 177 mm x 147 mm	8.98 dm ³	2087.00 g
4062172213370	PL-BRICK HP 1000 840 2X2	Karton wysyłkowy 120	345 mm x 177 mm x 147 mm	8.98 dm ³	2087.00 g
4062172036238	PL-BRICK HP 1900 722 2X4	Karton wysyłkowy 120	350 mm x 280 mm x 157 mm	15.39 dm ³	3686.00 g
4062172248785	PL-BRICK HP 1900 725 2X4	Karton wysyłkowy 120	350 mm x 280 mm x 157 mm	15.39 dm ³	3686.00 g
4062172036252	PL-BRICK HP 1900 727 2X4	Karton wysyłkowy 120	350 mm x 280 mm x 157 mm	15.39 dm ³	3686.00 g
4052899597211	PL-BRICK HP 1900 730 2X4	Karton wysyłkowy 120	350 mm x 280 mm x 157 mm	15.39 dm ³	3686.00 g
4052899597235	PL-BRICK HP 1900 740 2X4	Karton wysyłkowy 120	350 mm x 280 mm x 157 mm	15.39 dm ³	3686.00 g
4062172169134	PL-BRICK HP 1900 757 2X4	Karton wysyłkowy 120	350 mm x 280 mm x 157 mm	15.39 dm ³	3686.00 g
4062172248808	PL-BRICK HP 1900 765 2X4	Karton wysyłkowy 120	350 mm x 280 mm x 157 mm	15.39 dm ³	3686.00 g
4062172223386	PL-BRICK HP 1900 827 2X4	Karton wysyłkowy 120	350 mm x 280 mm x 157 mm	15.39 dm ³	3687.00 g
4052899597259	PL-BRICK HP 1900 840 2X4	Karton wysyłkowy 120	350 mm x 280 mm x 157 mm	15.39 dm ³	3686.00 g
4062172036191	PL-BRICK HP 2850 722 2X6	Karton wysyłkowy 120	410 mm x 350 mm x 160 mm	22.96 dm ³	5547.00 g
4062172248822	PL-BRICK HP 2850 725 2X6	Karton wysyłkowy 120	410 mm x 350 mm x 160 mm	22.96 dm ³	5547.00 g
4062172036214	PL-BRICK HP 2850 727 2X6	Karton wysyłkowy 120	410 mm x 350 mm x 160 mm	22.96 dm ³	5547.00 g
4062172028189	PL-BRICK HP 2850 730 2X6	Karton wysyłkowy 120	410 mm x 350 mm x 160 mm	22.96 dm ³	5547.00 g
4062172028202	PL-BRICK HP 2850 740 2X6	Karton wysyłkowy 120	410 mm x 350 mm x 160 mm	22.96 dm ³	5547.00 g
4062172169158	PL-BRICK HP 2850 757 2X6	Karton wysyłkowy 120	410 mm x 350 mm x 160 mm	22.96 dm ³	5547.00 g
4062172248846	PL-BRICK HP 2850 765 2X6	Karton wysyłkowy 120	410 mm x 350 mm x 160 mm	22.96 dm ³	5547.00 g

Karta katalogowa rodziny produktów

Dane logistyczne

4062172223416	PL-BRICK HP 2850 827 2X6	Karton wysylkowy 120	410 mm x 350 mm x 160 mm	22.96 dm ³	5547.00 g
4062172204569	PL-BRICK HP 2850 830 2X6	Karton wysylkowy 120	410 mm x 350 mm x 160 mm	22.96 dm ³	5547.00 g
4062172028226	PL-BRICK HP 2850 840 2X6	Karton wysylkowy 120	410 mm x 350 mm x 160 mm	22.96 dm ³	5547.00 g
4062172036153	PL-BRICK HP 3800 722 2X8	Karton wysylkowy 120	485 mm x 350 mm x 160 mm	27.16 dm ³	6706.00 g
4062172062480	PL-BRICK HP 3800 725 2X8	Karton wysylkowy 120	485 mm x 350 mm x 160 mm	27.16 dm ³	6706.00 g
4062172036177	PL-BRICK HP 3800 727 2X8	Karton wysylkowy 120	485 mm x 350 mm x 160 mm	27.16 dm ³	6706.00 g
4052899576292	PL-BRICK HP 3800 730 2X8	Karton wysylkowy 120	485 mm x 350 mm x 160 mm	27.16 dm ³	6706.00 g
4052899576315	PL-BRICK HP 3800 740 2X8	Karton wysylkowy 120	485 mm x 350 mm x 160 mm	27.16 dm ³	6706.00 g
4062172011068	PL-BRICK HP 3800 757 2X8	Karton wysylkowy 120	485 mm x 350 mm x 160 mm	27.16 dm ³	6706.00 g
4062172241588	PL-BRICK HP 3800 765 2X8	Karton wysylkowy 120	485 mm x 350 mm x 160 mm	27.16 dm ³	6706.00 g
4062172223430	PL-BRICK HP 3800 827 2X8	Karton wysylkowy 120	485 mm x 350 mm x 160 mm	27.16 dm ³	6706.00 g
4052899576339	PL-BRICK HP 3800 840 2X8	Karton wysylkowy 120	485 mm x 350 mm x 160 mm	27.16 dm ³	6706.00 g

Wymieniony kod produktu oznacza najmniejszą ilość produktu, jaka może być zamówiona. Jednostka transportowa może zawierać jedną sztukę lub więcej. Składając zamówienie prosimy o zamawianie ilości odpowiadających jednej lub wielokrotności jednostki transportowej.

Oświadczenie

Zastrzega się możliwość zmian bez uprzedzenia. Błędy i ominięcia są możliwe. Należy zawsze upewnić się czy korzystasz z najnowszej wersji katalogu.