

LINEARlight Rigid FINESSE



Cechy produktu

- Slim, modular LED fixture for linear applications, fully customizable
- Several optics, Wall Grazing and WallWashing; 10°, 30°, 60°
- Outdoor IP67 or Indoor IP43 versions available
- Large operating temperature range: from -30 ° to +50 ° Celsius
- Luminous flux: > 2000 lm/m; 1200 m/m; 900 lm/m
- Color uniformity ≤ 2 SDCM
- Lifetime up to 60.000 h L80B10; LM80 and LM79
- Large selection of color temperatures: 2400 K – 5000 K; CRI 80, CRI 90
- Dimmable by OPTOTRONIC LED driver from 0 % to 100 %
- Designed in Italy, made in Germany
- Durable, coated aluminum profile resistant to harsh environments: AMA

Korzyści ze stosowania produktu

- 15 lengths available to adapt to all conditions
- Easy to configure the desired light performance for optimal illumination
- Protected against the atmospheric agents: from the desert to the glacier
- Long-time functionality and maintenance-free
- High color fidelity to beautify every design
- Fully controllable by most used light control protocols: DALI, DMX
- Color consistent with LINEARlight FLEX products
- Several installation accessories available



Karta katalogowa rodziny produktów

Obszar zastosowań

- Wall Grazing
- Ambient lighting
- Wall washing
- Oświetlenie faset
- Architectural integration

Karta katalogowa rodziny produktów

Dane techniczne


Opis produktu	Informacje o produkcie	Dane elektryczne	Dane fotometryczne			Dane świetlne
	Oznaczenie produktu	Accidental reverse input voltage protection up to	Strumień świetlny	Światłość	Sprawność oprawy	Kąt rozsyłu światła
LR-P-2000 -927-10S-BK-15-TB-G1	LR-P-2000-927-1	25 V	3300 lm	5300 cd	0,76	10 °
LR-I-1200 -930-60S-BK-09-SK-G1	LR-I-1200-930-6	25 V	1500 lm		0,72	60 °
LR-P-1500 -RGBW840-10S-BK-15-TB-G12L	LR-P-1500-RGBW8	25 V	2500 lm		0,56	10 °
LR-P-400 -RGB-10S-BK-15-TB-G1 2L	LR-P-400-RGB-10	25 V	650 lm			10 °

Opis produktu	Wymiary i waga	Kolory i materiały			Temperatury i warunki pracy
	Wysokość	Materiał	Kolor produktu	Materiał osłony	Zakres temperatury otoczenia
LR-P-2000 -927-10S-BK-15-TB-G1	330 mm	Aluminium	Czarny	Poliwęglan	-30...+50 °C
LR-I-1200 -930-60S-BK-09-SK-G1	330 mm	Aluminium	Czarny	Poliwęglan	-20...+45 °C
LR-P-1500 -RGBW840-10S-BK-15-TB-G12L	330 mm	Aluminium	Szary	Poliwęglan	-20...+50 °C
LR-P-400 -RGB-10S-BK-15-TB-G1 2L	330 mm	Aluminium	Szary	Poliwęglan	-20...+50 °C

Opis produktu	Trwałość	Certyfikaty i Normy	Dane logistyczne	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
	Trwałość	Typ zabezpieczenia	Kod taryfy celnej	Date of Declaration	Primary Article Identifier
LR-P-2000 -927-10S-BK-15-TB-G1	60000 h	IP67	94051190900	27-05-2022	4062172144896
LR-I-1200 -930-60S-BK-09-SK-G1	60000 h	IP43	94051190900	28-06-2022	4062172156226
LR-P-1500 -RGBW840-10S-BK-15-TB-G12L	60000 h	IP67	94051190900	28-06-2022	4062172226974
LR-P-400 -RGB-10S-BK-15-TB-G1 2L		IP67	94051190900	28-06-2022	4062172226998

Opis produktu	Declaration No. in SCIP database	Możliwości	
		Regulowany	Regulacja koloru (RGB)
LR-P-2000 -927-10S-BK-15-TB-G1	In work		
LR-I-1200 -930-60S-BK-09-SK-G1	In work		
LR-P-1500 -RGBW840-10S-BK-15-TB-G12L	In work	Nie	Tak
LR-P-400 -RGB-10S-BK-15-TB-G1 2L	In work	Nie	Tak


Karta katalogowa rodziny produktów

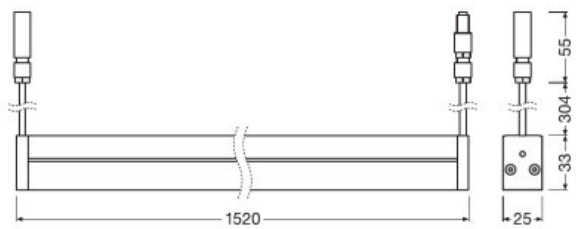

LR-P-2000-927-10S-BK-15-TB-G1 DRAW 200220




LR-P-2000-927-10S-BK-15-TB-G1 DRAW 200220

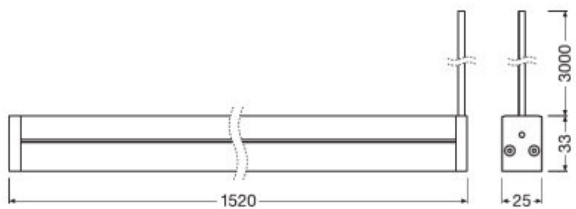

LR-I-1200-930LR-I-1200-930-6 DRAW 270420



LR-I-1200-930LR-I-1200-930-6 DRAW 270420

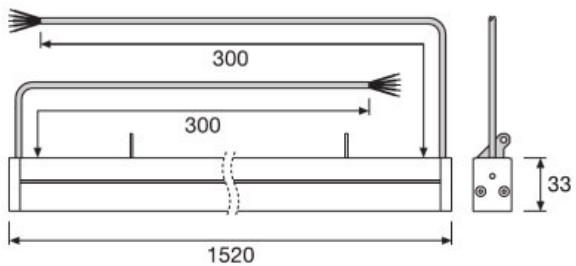

LINEARlight Rigid FINESSE RGB RGBW - 2D drawing dimensions

Karta katalogowa rodziny produktów

Wskazówki dotyczące zastosowania

Więcej szczegółowych informacji dotyczących grafik i zastosowania znajduje się w karcie katalogowej produktu

Sprzedaż i pomoc techniczna

Sprzedaż i pomoc techniczna www.osram.com

Pobierz dane

Plik	
	User instruction FINESSE
	User instruction FINESSE RGB RGBW
	Product Datasheet LINEARlight RIGID FINESSE (EN)
	Product Datasheet LINEARlight RIGID FINESSE RGB (W) (EN)
	Broszury Light is awesome - LINEARlight Rigid FINESSE (EN)
	Certyfikaty Finesse LR P fixed CB 04032022
	Certyfikaty Finesse LR P fixed D 04032022
	Certyfikaty Finesse LR P fixed ENEC
	Certyfikaty Finesse LR P floodligh CB 04032022
	Certyfikaty Finesse LR P floodligh D 04032022
	Certyfikaty Finesse LR P floodligh ENEC 04032022
	Dane CAD LRF-P-2000-ABC-XX-YY-02-ZZ-G1 STEP 070420
	Dane CAD 3-dim LRF-P-2000-ABC-XX-YY-03-ZZ-G1 STEP 070420
	Dane CAD 3-dim LRF-P-2000-ABC-XX-YY-04-ZZ-G1 STEP 070420
	Dane CAD 3-dim LRF-P-2000-ABC-XX-YY-05-ZZ-G1 STEP 070420
	Dane CAD 3-dim LRF-P-2000-ABC-XX-YY-06-ZZ-G1 STEP 070420

Karta katalogowa rodziny produktów

	Dane CAD 3-dim LRF-P-2000-ABC-XX-YY-07-ZZ-G1 STEP 070420
	Dane CAD 3-dim LRF-P-2000-ABC-XX-YY-08-ZZ-G1 STEP 070420
	Dane CAD 3-dim LRF-P-2000-ABC-XX-YY-09-ZZ-G1 STEP 070420
	Dane CAD 3-dim LRF-P-2000-ABC-XX-YY-10-ZZ-G1 STEP 070420
	Dane CAD 3-dim LRF-P-2000-ABC-XX-YY-11-ZZ-G1 STEP 070420
	Dane CAD 3-dim LRF-P-2000-ABC-XX-YY-12-ZZ-G1 STEP 070420
	Dane CAD 3-dim LRF-P-2000-ABC-XX-YY-13-ZZ-G1 STEP 070420
	Dane CAD 3-dim LRF-P-2000-ABC-XX-YY-14-ZZ-G1
	Dane CAD 3-dim LRF-P-2000-ABC-XX-YY-15-ZZ-G1
	Eulumdat LR-x-2000-930-10B-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-10S-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-120D-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-30S-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-60S-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-90T-xx-10-xx-G1 LTD
	Eulumdat LR-x-2000-930-WW-xx-10-xx-G1 LTD
	IES data LR-x-2000-930-10B-xx-10-xx-G1 IES
	IES data LR-x-2000-930-10S-xx-10-xx-G1 IES
	IES data LR-x-2000-930-120D-xx-10-xx-G1 IES
	IES data LR-x-2000-930-30S-xx-10-xx-G1 IES
	IES data LR-x-2000-930-60S-xx-10-xx-G1 IES
	IES data LR-x-2000-930-90T-xx-10-xx-G1 IES
	IES data LR-x-2000-930-WW-xx-10-xx-G1 IES

Karta katalogowa rodziny produktów

	Certyfikaty LR-I Finesse Demko 28022022
	Certyfikaty LR-I Finesse ENEC 28022022
	Certyfikaty LR-I Finesse CB 28022022
	Eulumdat LR-x-2000-930-30S-xx-10-xx-G1 LTD 010220
	Eulumdat LR-x-2000-930-90T-xx-10-xx-G1 LTD 010220
	Eulumdat LR-x-2000-930-120D-xx-10-xx-G1 LTD 010220
	Eulumdat LR-x-2000-930-WW-xx-10-xx-G1 LTD 010220
	Eulumdat LR-x-2000-930-10S-xx-10-xx-G1 LTD 010220
	Eulumdat LR-P-1500-RGBW930-10B-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-10B-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-10B-XX-10-G1 Red LTD
	Eulumdat LR-P-1500-RGBW930-10B-XX-10-G1 White LTD
	Eulumdat LR-P-1500-RGBW930-10S-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-10S-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-10S-XX-10-G1 Red LTD
	Eulumdat LR-P-1500-RGBW930-10S-XX-10-G1 White LTD
	Eulumdat LR-P-1500-RGBW930-120D-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-120D-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-120D-XX-10-G1 Red LTD
	Eulumdat LR-P-1500-RGBW930-120D-XX-10-G1 White LTD
	Eulumdat LR-P-1500-RGBW930-30S-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-30S-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-30S-XX-10-G1 Red LTD

Karta katalogowa rodziny produktów

	Eulumdat LR-P-1500-RGBW930-30S-XX-10-G1 White LTD
	Eulumdat LR-P-1500-RGBW930-WW-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-WW-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-WW-XX-10-G1 Red LTD
	Eulumdat LR-P-1500-RGBW930-WW-XX-10-G1 White LTD
	IES data LR-P-1500-RGBW930-10B-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-10B-XX-10-G1 Green IES
	IES data LR-P-1500-RGBW930-10B-XX-10-G1 Red IES
	IES data LR-P-1500-RGBW930-10B-XX-10-G1 White IES
	IES data LR-P-1500-RGBW930-10S-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-10S-XX-10-G1 Green IES
	IES data LR-P-1500-RGBW930-10S-XX-10-G1 Red IES
	IES data LR-P-1500-RGBW930-10S-XX-10-G1 White IES
	IES data LR-P-1500-RGBW930-120D-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-120D-XX-10-G1 Green IES
	IES data LR-P-1500-RGBW930-120D-XX-10-G1 Red IES
	IES data LR-P-1500-RGBW930-120D-XX-10-G1 White IES
	IES data LR-P-1500-RGBW930-30S-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-30S-XX-10-G1 Green IES
	IES data LR-P-1500-RGBW930-30S-XX-10-G1 Red IES
	IES data LR-P-1500-RGBW930-30S-XX-10-G1 White IES
	IES data LR-P-1500-RGBW930-WW-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-WW-XX-10-G1 Green IES

Karta katalogowa rodziny produktów

	IES data LR-P-1500-RGBW930-WW-XX-10-G1 Red IES
	IES data LR-P-1500-RGBW930-WW-XX-10-G1 White IES

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Dane logistyczne

Kod produktu	Opis produktu	Opakowanie (liczba produktów / opakowanie)	Wymiary (długość x szerokość x wysokość)	Objętość	Waga brutto
4062172144896	LR-P-2000 -927-10S-BK-15-TB-G1	Karton wysyłkowy 6	1638 mm x 121 mm x 111 mm	22.00 dm ³	10043.00 g
4062172156226	LR-I-1200 -930-60S-BK-09-SK-G1	Karton wysyłkowy 10	1038 mm x 189 mm x 111 mm	21.78 dm ³	10041.00 g
4062172226974	LR-P-1500 -RGBW840-10S-BK-15-TB-G12L	Karton wysyłkowy 6	1638 mm x 121 mm x 111 mm	22.00 dm ³	10043.00 g
4062172226998	LR-P-400 -RGB-10S-BK-15-TB-G1 2L	Karton wysyłkowy 6	1638 mm x 121 mm x 111 mm	22.00 dm ³	10043.00 g

Wymieniony kod produktu oznacza najmniejszą ilość produktu, jaka może być zamówiona. Jednostka transportowa może zawierać jedną sztukę lub więcej. Składając zamówienie prosimy o zamawianie ilości odpowiadających jednej lub wielokrotności jednostki transportowej.

Oświadczenie

Zastrzega się możliwość zmian bez uprzedzenia. Błędy i ominięcia są możliwe. Należy zawsze upewnić się czy korzystasz z najnowszej wersji katalogu.