

Optical surface slim profile 12x16 mm | lens cover

Accessories for Flexible LED strips

Cechy produktu

- Compatible with TEC Flex



Korzyści ze stosowania produktu

- Profile aluminiowe – wytrzymałe i odporne na korozję dzięki anodowanej powłoce


Karta katalogowa rodziny produktów

Dane techniczne


	Wymiary i waga		Dane logistyczne	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)
Opis produktu	Długość	Masa produktu	Kod taryfy celnej	Date of Declaration
FX-QMS-G1 -ELGH-TU16H12LS	160 mm	100 g	39269097900	11-02-2022
FX-QMS-G1 -CLT-300	3000 mm	21800 g	39169050900	30-08-2022
FX-QMS-G1 -CFDB-300	3000 mm	51,75 g	39169050900	30-08-2022
FX-QMS-G1 -CFTL-300	3000 mm	5850 g	39269097900	11-02-2022

Opis produktu	Primary Article Identifier	Candidate List Substance 1	Declaration No. in SCIP database
FX-QMS-G1 -ELGH-TU16H12LS	4052899999961	No declarable substances contained	No declarable substances contained
FX-QMS-G1 -CLT-300	4052899447783	No declarable substances contained	No declarable substances contained
FX-QMS-G1 -CFDB-300	4052899446991	No declarable substances contained	No declarable substances contained
FX-QMS-G1 -CFTL-300	4052899999749	No declarable substances contained	No declarable substances contained


Karta katalogowa rodziny produktów

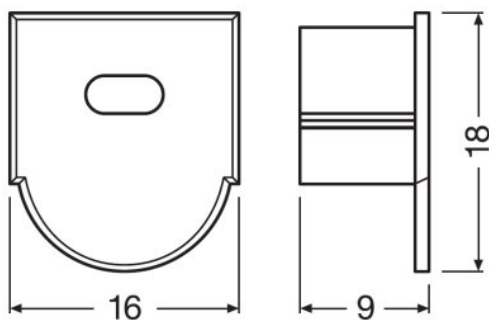

FX-QMS-G1-ELGH-TU16H12LS



729122_FX-QMS-G1-CLT-300




729068_FX-QMS-G1-CLT-300



729001_FX-QMS-G1-CFDB-300



729069_FX-QMS-G1-CFDB-300



FX-QMS-G1-CFTL-300

Karta katalogowa rodziny produktów

Wskazówki dotyczące zastosowania

Więcej szczegółowych informacji dotyczących grafik i zastosowania znajduje się w karcie katalogowej produktu

Sprzedaż i pomoc techniczna

Sprzedaż i pomoc techniczna www.osram.com

Pobierz dane

Plik	
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU16H12LS-300 (EN)
	Broszury Light is freedom of design (EN)
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU16H12-300 (EN)
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-T45D19H19-300 (EN)
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU15H6-300 (EN)
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU15H6W3-300 (EN)
	Product Datasheet Specification Sheet Slim Track FX-QMS-G1-TU16H12W3-300 (EN)
	Product Datasheet Specification Sheet Wide Profile FX-QMS-G1-TR19H16-300

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Dane logistyczne

Kod produktu	Opis produktu	Opakowanie (liczba produktów / opakowanie)	Wymiary (długość x szerokość x wysokość)	Objętość	Waga brutto
4052899999961	FX-QMS-G1 -ELGH-TU16H12LS	Karton wysyłkowy 400	175 mm x 145 mm x 110 mm	2.79 dm ³	506.00 g
4052899447783	FX-QMS-G1 -CLT-300	Karton wysyłkowy 40	3020 mm x 100 mm x 100 mm	30.20 dm ³	9800.00 g
4052899446991	FX-QMS-G1 -CFDB-300	Karton wysyłkowy 40	3060 mm x 225 mm x 225 mm	154.91 dm ³	3293.00 g
4052899999749	FX-QMS-G1 -CFTL-300	Karton wysyłkowy 40	3020 mm x 80 mm x 30 mm	7.25 dm ³	2880.00 g

Wymieniony kod produktu oznacza najmniejszą ilość produktu, jaka może być zamówiona. Jednostka transportowa może zawierać jedną sztukę lub więcej. Składając zamówienie prosimy o zamawianie ilości odpowiadających jednej lub wielokrotności jednostki transportowej.

Oświadczenie

Zastrzega się możliwość zmian bez uprzedzenia. Błędy i ominięcia są możliwe. Należy zawsze upewnić się czy korzystasz z najnowszej wersji katalogu.