

PrevaLED BRICK HP Z2

LED modules for industry and outdoor applications

Cechy produktu

- Module efficacy: up to 186 lm/W
- Available with color temperature: 2,200 K, 2,700 K, 3,000 K and 4000 K
- Stopień ochrony: IP20



Obszar zastosowań

- Oświetlenie drogowe
- Przemysł
- Oświetlenie przestrzeni



Karta katalogowa rodziny produktów

Dane techniczne

Opis produktu	Dane elektryczne				Dane fotometryczne
	Prąd znamionowy	Rodzaj prądu	On-mode power	Energy consumption in on-mode [AGGR]	Skuteczność świetlna
PL-BRICK HP-Z2 1900 722 2X4	07 A	DC	16.00 W	16.0 kWh/1000h	133 lm/W
PL-BRICK HP-Z2 1900 727 2X4	07 A	DC	16.00 W	16.0 kWh/1000h	148 lm/W
PL-BRICK HP-Z2 1900 730 2X4	07 A	DC	16.00 W	16.0 kWh/1000h	163 lm/W
PL-BRICK HP-Z2 1900 740 2X4	07 A	DC	16.00 W	16.0 kWh/1000h	173 lm/W
PL-BRICK HP-Z2 1900 830 2X4	0,7 A	DC	16.20 W	16.2 kWh/1000h	146 lm/W
PL-BRICK HP-Z2 2850 722 2X6	07 A	DC	24.00 W	24.0 kWh/1000h	133 lm/W
PL-BRICK HP-Z2 2850 727 2X6	07 A	DC	24.10 W	24.1 kWh/1000h	148 lm/W
PL-BRICK HP-Z2 2850 730 2X6	07 A	DC	23.9 W	23.9 kWh/1000h	163 lm/W
PL-BRICK HP-Z2 2850 740 2X6	07 A	DC	24.00 W	24.0 kWh/1000h	173 lm/W
PL-BRICK HP-Z2 3800 722 2X8	07 A	DC	32.10 W	32.1 kWh/1000h	133 lm/W
PL-BRICK HP-Z2 3800 727 2X8	07 A	DC	32.10 W	32.1 kWh/1000h	148 lm/W
PL-BRICK HP-Z2 3800 730 2X8	07 A	DC	31.90 W	31.9 kWh/1000h	163 lm/W
PL-BRICK HP-Z2 3800 740 2X8	07 A	DC	32.00 W	32.0 kWh/1000h	173 lm/W
PL-BRICK HP-Z2 3800 830 2X8	0,7 A	DC	32.30 W	32.3 kWh/1000h	146 lm/W

Opis produktu	Ogólny wskaźnik oddawania barw Ra	Useful luminous flux (Φuse) [AGGR]	Colour consistency (McAdam ellipses) [AGGR]	Correlated color temperature CCT [AGGR]	Dane świetlne
					Kąt rozsyłu światła
PL-BRICK HP-Z2 1900 722 2X4	70	2036 lm	5	2200 K	0 °
PL-BRICK HP-Z2 1900 727 2X4	70	2350 lm	5	2700 K	0 °
PL-BRICK HP-Z2 1900 730 2X4	70	2506 lm	5	3000 K	0 °
PL-BRICK HP-Z2 1900 740 2X4	70	2663 lm	5	4000 K	0 °
PL-BRICK HP-Z2 1900 830 2X4	82	2190 lm	3	3000 K	120 °
PL-BRICK HP-Z2 2850 722 2X6	70	3054 lm	5	2200 K	0 °
PL-BRICK HP-Z2 2850 727 2X6	70	3524 lm	5	2700 K	0 °
PL-BRICK HP-Z2 2850 730 2X6	>70	3759 lm	5	3000 K	0 °
PL-BRICK HP-Z2 2850 740 2X6	70	3994 lm	5	4000 K	0 °
PL-BRICK HP-Z2 3800 722 2X8	70	4073 lm	5	2200 K	0 °
PL-BRICK HP-Z2 3800 727 2X8	70	4699 lm	5	2700 K	0 °
PL-BRICK HP-Z2 3800 730 2X8	70	5002 lm	5	3000 K	0 °
PL-BRICK HP-Z2 3800 740 2X8	70	5306 lm	5	4000 K	0 °
PL-BRICK HP-Z2 3800 830 2X8	82	4386 lm	3	3000 K	120 °

Opis produktu	Dane o module LED	Wymiary i waga			
	Liczba LED w module	Masa produktu	Width EPREL [AGGR]	Length EPREL [AGGR]	Height EPREL [AGGR]
PL-BRICK HP-Z2 1900 722 2X4	8	2700 g	50.0 mm	121.0 mm	8.0 mm

Karta katalogowa rodziny produktów

Opis produktu	Dane o module LED	Wymiary i waga			
	Liczba LED w module	Masa produktu	Width EPREL [AGGR]	Length EPREL [AGGR]	Height EPREL [AGGR]
PL-BRICK HP-Z2 1900 727 2X4	8	2700 g	50.0 mm	121.0 mm	8.0 mm
PL-BRICK HP-Z2 1900 730 2X4	8	2700 g	50.0 mm	121.0 mm	8.0 mm
PL-BRICK HP-Z2 1900 740 2X4	8	2700 g	50.0 mm	121.0 mm	8.0 mm
PL-BRICK HP-Z2 1900 830 2X4	8	27,00 g	50.0 mm	121.0 mm	6.0 mm
PL-BRICK HP-Z2 2850 722 2X6	12	4000 g	50.0 mm	172.0 mm	8.0 mm
PL-BRICK HP-Z2 2850 727 2X6	12	4000 g	50.0 mm	172.0 mm	8.0 mm
PL-BRICK HP-Z2 2850 730 2X6	12	4000 g	50 mm	172 mm	8 mm
PL-BRICK HP-Z2 2850 740 2X6	12	4000 g	50.0 mm	172.0 mm	8.0 mm
PL-BRICK HP-Z2 3800 722 2X8	16	5000 g	50.0 mm	224.0 mm	8.0 mm
PL-BRICK HP-Z2 3800 727 2X8	16	5000 g	50.0 mm	224.0 mm	8.0 mm
PL-BRICK HP-Z2 3800 730 2X8	16	5000 g	50.0 mm	224.0 mm	8.0 mm
PL-BRICK HP-Z2 3800 740 2X8	16	5000 g	50.0 mm	224.0 mm	8.0 mm
PL-BRICK HP-Z2 3800 830 2X8	16	50,00 g	50.0 mm	223.0 mm	6.0 mm

Opis produktu	Temperatury i warunki pracy	Trwałość	Dodatkowe dane produktu	Możliwości
	Zakres temperatury magazynowania	Lumen maintenance factor LMF [AGGR]	Lighting technology used [AGGR]	Ściemnianie
PL-BRICK HP-Z2 1900 722 2X4	-30...85 °C	96	LED	Tak
PL-BRICK HP-Z2 1900 727 2X4	-30...85 °C	96	LED	Tak
PL-BRICK HP-Z2 1900 730 2X4	-30...85 °C	96	LED	Tak
PL-BRICK HP-Z2 1900 740 2X4	-30...85 °C	96	LED	Tak
PL-BRICK HP-Z2 1900 830 2X4	-30...85 °C	96	LED	Tak
PL-BRICK HP-Z2 2850 722 2X6	-30...85 °C	96	LED	Tak
PL-BRICK HP-Z2 2850 727 2X6	-30...85 °C	96	LED	Tak
PL-BRICK HP-Z2 2850 730 2X6	-30...85 °C	96	LED	Tak
PL-BRICK HP-Z2 2850 740 2X6	-30...85 °C	96	LED	Tak
PL-BRICK HP-Z2 3800 722 2X8	-30...85 °C	96	LED	Tak
PL-BRICK HP-Z2 3800 727 2X8	-30...85 °C	96	LED	Tak
PL-BRICK HP-Z2 3800 730 2X8	-30...85 °C	96	LED	Tak
PL-BRICK HP-Z2 3800 740 2X8	-30...85 °C	96	LED	Tak
PL-BRICK HP-Z2 3800 830 2X8	-30...85 °C	96	LED	Tak


Opis produktu	Certyfikaty i Normy			Dane logistyczne
	Typ zabezpieczenia	Normy	Energy efficiency class [AGGR]	Kod taryfy celnej
PL-BRICK HP-Z2 1900 722 2X4	IP20	CE/ENEC	E	85395100000
PL-BRICK HP-Z2 1900 727 2X4	IP20	CE/ENEC	D	85395100000
PL-BRICK HP-Z2 1900 730 2X4	IP20	CE/ENEC	D	85395100000
PL-BRICK HP-Z2 1900 740 2X4	IP20	CE/ENEC	D	85395100000
PL-BRICK HP-Z2 1900 830 2X4	IP20	CE/ENEC	E	85395100000
PL-BRICK HP-Z2 2850 722 2X6	IP20	CE/ENEC	E	85395100000
PL-BRICK HP-Z2 2850 727 2X6	IP20	CE/ENEC	D	85395100000

Karta katalogowa rodziny produktów


Opis produktu	Certyfikaty i Normy			Dane logistyczne
	Typ zabezpieczenia	Normy	Energy efficiency class [AGGR]	Kod taryfy celnej
PL-BRICK HP-Z2 2850 730 2X6	IP20	CE/ENEC	D	85395100000
PL-BRICK HP-Z2 2850 740 2X6	IP20	CE/ENEC	D	85395100000
PL-BRICK HP-Z2 3800 722 2X8	IP20	CE/ENEC	E	85395100000
PL-BRICK HP-Z2 3800 727 2X8	IP20	CE/ENEC	D	85395100000
PL-BRICK HP-Z2 3800 730 2X8	IP20	CE/ENEC	D	85395100000
PL-BRICK HP-Z2 3800 740 2X8	IP20	CE/ENEC	D	85395100000
PL-BRICK HP-Z2 3800 830 2X8	IP20	CE/ENEC	E	85395100000

Opis produktu	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)			
	Date of Declaration	Primary Article Identifier	Candidate List Substance 1	Declaration No. in SCIP database
PL-BRICK HP-Z2 1900 722 2X4	23-06-2023	4062172064330	No declarable substances contained	No declarable substances contained
PL-BRICK HP-Z2 1900 727 2X4	23-06-2023	4062172064354	No declarable substances contained	No declarable substances contained
PL-BRICK HP-Z2 1900 730 2X4	23-06-2023	4062172064392	No declarable substances contained	No declarable substances contained
PL-BRICK HP-Z2 1900 740 2X4	23-06-2023	4062172064439	No declarable substances contained	No declarable substances contained
PL-BRICK HP-Z2 1900 830 2X4	23-06-2023	4062172179508	No declarable substances contained	No declarable substances contained
PL-BRICK HP-Z2 2850 722 2X6	23-06-2023	4062172064453	No declarable substances contained	No declarable substances contained
PL-BRICK HP-Z2 2850 727 2X6	23-06-2023	4062172064477	No declarable substances contained	No declarable substances contained
PL-BRICK HP-Z2 2850 730 2X6	23-06-2023	4062172064491	No declarable substances contained	No declarable substances contained
PL-BRICK HP-Z2 2850 740 2X6	23-06-2023	4062172064514	No declarable substances contained	No declarable substances contained
PL-BRICK HP-Z2 3800 722 2X8	23-06-2023	4062172064538	No declarable substances contained	No declarable substances contained
PL-BRICK HP-Z2 3800 727 2X8	23-06-2023	4062172064552	No declarable substances contained	No declarable substances contained
PL-BRICK HP-Z2 3800 730 2X8	23-06-2023	4062172064576	No declarable substances contained	No declarable substances contained
PL-BRICK HP-Z2 3800 740 2X8	23-06-2023	4062172064590	No declarable substances contained	No declarable substances contained
PL-BRICK HP-Z2 3800 830 2X8	23-06-2023	4062172179546	No declarable substances contained	No declarable substances contained


Karta katalogowa rodziny produktów

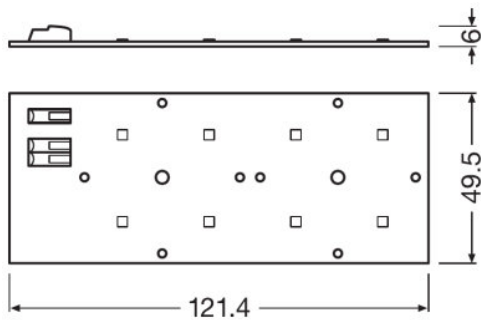


PL-BRICK HP 1900 730 740 840

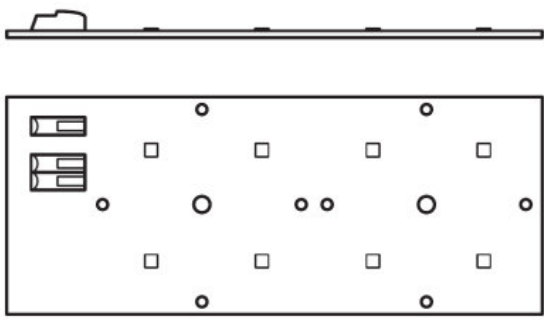

PL-BRICK HP 1900 730 740 840

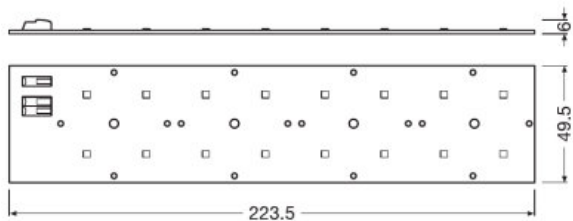

PL-BRICK HP 3800 730 740 840

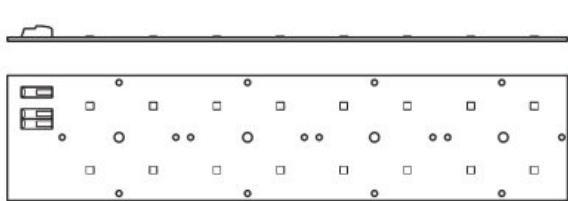

PL-BRICK HP 3800 730 740 840

Wskazówki dotyczące zastosowania

Więcej szczegółowych informacji dotyczących grafik i zastosowania znajduje się w karcie katalogowej produktu

Sprzedaż i pomoc techniczna

Sprzedaż i pomoc techniczna www.osram.com

Pobierz dane

Plik	
	Certyfikaty PL BRICK BA BAR CLE VDE ENEC 40045382 210723
	Product Datasheet BRICK HP DS 201020

Karta katalogowa rodziny produktów

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Dane logistyczne

Kod produktu	Opis produktu	Opakowanie (liczba produktów / opakowanie)	Wymiary (długość x szerokość x wysokość)	Objętość	Waga brutto
4062172064330	PL-BRICK HP-Z2 1900 722 2X4	Karton wysyłkowy 120	350 mm x 280 mm x 157 mm	15.39 dm ³	3686.00 g
4062172064354	PL-BRICK HP-Z2 1900 727 2X4	Karton wysyłkowy 120	350 mm x 280 mm x 157 mm	15.39 dm ³	3686.00 g
4062172064392	PL-BRICK HP-Z2 1900 730 2X4	Karton wysyłkowy 120	350 mm x 280 mm x 157 mm	15.39 dm ³	3686.00 g
4062172064439	PL-BRICK HP-Z2 1900 740 2X4	Karton wysyłkowy 120	350 mm x 280 mm x 157 mm	15.39 dm ³	3686.00 g
4062172179508	PL-BRICK HP-Z2 1900 830 2X4	Karton wysyłkowy 120	350 mm x 280 mm x 157 mm	15.39 dm ³	3686.00 g
4062172064453	PL-BRICK HP-Z2 2850 722 2X6	Karton wysyłkowy 120	410 mm x 350 mm x 160 mm	22.96 dm ³	5547.00 g
4062172064477	PL-BRICK HP-Z2 2850 727 2X6	Karton wysyłkowy 120	410 mm x 350 mm x 160 mm	22.96 dm ³	5547.00 g
4062172064491	PL-BRICK HP-Z2 2850 730 2X6	Karton wysyłkowy 120	410 mm x 350 mm x 160 mm	22.96 dm ³	5547.00 g
4062172064514	PL-BRICK HP-Z2 2850 740 2X6	Karton wysyłkowy 120	410 mm x 350 mm x 160 mm	22.96 dm ³	5547.00 g
4062172064538	PL-BRICK HP-Z2 3800 722 2X8	Karton wysyłkowy 120	485 mm x 350 mm x 160 mm	27.16 dm ³	6706.00 g
4062172064552	PL-BRICK HP-Z2 3800 727 2X8	Karton wysyłkowy 120	485 mm x 350 mm x 160 mm	27.16 dm ³	6706.00 g
4062172064576	PL-BRICK HP-Z2 3800 730 2X8	Karton wysyłkowy 120	485 mm x 350 mm x 160 mm	27.16 dm ³	6706.00 g
4062172064590	PL-BRICK HP-Z2 3800 740 2X8	Karton wysyłkowy 120	485 mm x 350 mm x 160 mm	27.16 dm ³	6706.00 g
4062172179546	PL-BRICK HP-Z2 3800 830 2X8	Karton wysyłkowy 120	485 mm x 350 mm x 160 mm	27.16 dm ³	6706.00 g

Wymieniony kod produktu oznacza najmniejszą ilość produktu, jaka może być zamówiona. Jednostka transportowa może zawierać jedną sztukę lub więcej. Składając zamówienie prosimy o zamawianie ilości odpowiadających jednej lub wielokrotności jednostki transportowej.

Oświadczenie

Zastrzega się możliwość zmian bez uprzedzenia. Błędy i ominięcia są możliwe. Należy zawsze upewnić się czy korzystasz z najnowszej wersji katalogu.