

LINEARlight Rigid FINESSE InGround



Cechy produktu

- Slim, modular LED fixture for linear applications, fully customizable
- Several optics, Wall Grazing and WallWashing; 10°, 30°, 60°
- Outdoor IP67
- Luminous flux: > 2000 lm/m; 1200 lm/m; 900 lm/m
- Color uniformity ≤ 2 SDCM
- Lifetime up to 60.000 h L80B10
- Large selection of lighting color temperatures

Korzyści ze stosowania produktu

- 3 lengths available to adapt to different conditions
- External metal case available
- Easy to configure the desired light performance for optimal illumination
- Protected against the atmospheric agents: from the desert to the glacier
- Long-time functionality and maintenance-free
- High color fidelity to beautify every design
- Fully controllable by most used light control protocols: DALI, DMX
- Color consistent with LINEARlight FLEX products

Obszar zastosowań

- Wall washing
- Wall Grazing
- Architectural integration



Karta katalogowa rodziny produktów

Dane techniczne

Opis produktu	Dane elektryczne			Dane świetlne	Dane o module LED	Wymiary i waga
	Zakres napięcia wejściowego	Accidental reverse input voltage protection up to	Rodzaj prądu	LED pitch	Liczba LED w najmniejszej jedn. podziału	Długość przewodów
LR-P-1500 -RGBW830-120DBK06IGG1L	23...25 V	25 V	DC	16.67 mm	72	250,0
LR-P-2000 -927-120D-BK-06-IG-G1 L1	23...25 V	25 V	DC	14.29 mm	42	2500
LR-P-400 -RGB-120D-BK-06-IG-G1 L1	23...25 V	25 V	DC	16.67 mm	36	2500
LR-P-2000 -927-10S-BK-06-IG-G1 L1	23...25 V	25 V	DC	14.29 mm	42	2500
LR-P-2000 -927-10H-BK-06-IG-G1 L1	23...25 V	25 V	DC	14.29 mm	42	2500
LR-P-2000 -927-10S-BK-12-IG-G1 L1	23...25 V	25 V	DC	14.29 mm	84	2500
LR-P-400 -RGB-120D-BK-12-IG-G1 L1	23...25 V	25 V	DC	16.67 mm	72	2500
LR-P-2000 -927-10H-BK-12-IG-G1 L1	23...25 V	25 V	DC	14.29 mm	84	2500
LR-P-1500 -RGBW830-120D-BK-12-IG-G1 L1	23...25 V	25 V	DC	16.67 mm	144	2500
LR-P-2000 -927-120D-BK-12-IG-G1 L1	23...25 V	25 V	DC	14.29 mm	84	2500

Opis produktu	Temperatury i warunki pracy	Trwałość		Możliwości
	Zakres temperatury magazynowania	Related Lifetime L90B10	Related Lifetime L80B10	With connection set
LR-P-1500 -RGBW830-120DBK06IGG1L	-20...85 °C	60000 h	60000 h	Nie
LR-P-2000 -927-120D-BK-06-IG-G1 L1	-20...85 °C	60000 h	60000 h	Nie
LR-P-400 -RGB-120D-BK-06-IG-G1 L1	-20...85 °C	60000 h	60000 h	Nie
LR-P-2000 -927-10S-BK-06-IG-G1 L1	-20...85 °C	60000 h	60000 h	Nie
LR-P-2000 -927-10H-BK-06-IG-G1 L1	-20...85 °C	60000 h	60000 h	Nie
LR-P-2000 -927-10S-BK-12-IG-G1 L1	-20...85 °C	60000 h	60000 h	Nie
LR-P-400 -RGB-120D-BK-12-IG-G1 L1	-20...85 °C	60000 h	60000 h	Nie
LR-P-2000 -927-10H-BK-12-IG-G1 L1	-20...85 °C	60000 h	60000 h	Nie
LR-P-1500 -RGBW830-120D-BK-12-IG-G1 L1	-20...85 °C	60000 h	60000 h	Nie
LR-P-2000 -927-120D-BK-12-IG-G1 L1	-20...85 °C	60000 h	60000 h	Nie


Opis produktu	With end piece	Certyfikaty i Normy	Dane logistyczne
		Normy	Kod taryfy celnej
LR-P-1500 -RGBW830-120DBK06IGG1L	Nie	CE/ENEC	94051190900

Karta katalogowa rodziny produktów

Opis produktu	With end piece	Certyfikaty i Normy	Dane logistyczne
		Normy	Kod taryfy celnej
LR-P-2000 -927-120D-BK-06-IG-G1 L1	Nie	CE/ENEC	94051190900
LR-P-400 -RGB-120D-BK-06-IG-G1 L1	Nie	CE/ENEC	94051190900
LR-P-2000 -927-10S-BK-06-IG-G1 L1	Nie	CE/ENEC	94051190900
LR-P-2000 -927-10H-BK-06-IG-G1 L1	Nie	CE/ENEC	94051190900
LR-P-2000 -927-10S-BK-12-IG-G1 L1	Nie	CE/ENEC	94051190900
LR-P-400 -RGB-120D-BK-12-IG-G1 L1	Nie	CE/ENEC	94051190900
LR-P-2000 -927-10H-BK-12-IG-G1 L1	Nie	CE/ENEC	94051190900
LR-P-1500 -RGBW830-120D-BK-12-IG-G1 L1	Nie	CE/ENEC	94051190900
LR-P-2000 -927-120D-BK-12-IG-G1 L1	Nie	CE/ENEC	94051190900

Opis produktu	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)		
	Date of Declaration	Primary Article Identifier	Declaration No. in SCIP database
LR-P-1500 -RGBW830-120DBK06IGG1L	02-12-2022	4062172307765	In work
LR-P-2000 -927-120D-BK-06-IG-G1 L1	02-12-2022	4062172325646	In work
LR-P-400 -RGB-120D-BK-06-IG-G1 L1	02-12-2022	4062172325684	In work
LR-P-2000 -927-10S-BK-06-IG-G1 L1	02-12-2022	4062172325608	In work
LR-P-2000 -927-10H-BK-06-IG-G1 L1	02-12-2022	4062172325561	In work
LR-P-2000 -927-10S-BK-12-IG-G1 L1	02-12-2022	4062172325622	In work
LR-P-400 -RGB-120D-BK-12-IG-G1 L1	02-12-2022	4062172325707	In work
LR-P-2000 -927-10H-BK-12-IG-G1 L1	02-12-2022	4062172325585	In work
LR-P-1500 -RGBW830-120D-BK-12-IG-G1 L1	02-12-2022	4062172325547	In work
LR-P-2000 -927-120D-BK-12-IG-G1 L1	02-12-2022	4062172325660	In work

Karta katalogowa rodziny produktów

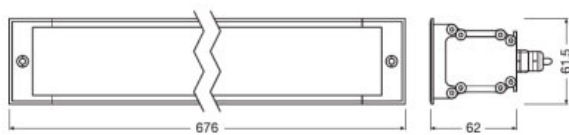


LR FINESSE In Ground Line Drawings



LR FINESSE In Ground Line Drawings



LR FINESSE In Ground Line Drawings

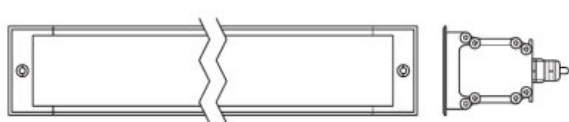

LR FINESSE In Ground Line Drawings

Wskazówki dotyczące zastosowania

Więcej szczegółowych informacji dotyczących grafik i zastosowania znajduje się w karcie katalogowej produktu

Sprzedaż i pomoc techniczna

Sprzedaż i pomoc techniczna www.osram.com

Pobierz dane

Plik	
	User instruction LINEARlight Rigid FINESSE In Ground
	Product Datasheet LINEARlight RIGID FINESSE InGround Specification Sheet

	Broszury Light is awesome - LINEARlight Rigid FINESSE (EN)
---	---

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Dane logistyczne

Kod produktu	Opis produktu	Opakowanie (liczba produktów / opakowanie)	Wymiary (długość x szerokość x wysokość)	Objętość	Waga brutto
4062172307765	LR-P-1500 -RGBW830-120DBK06IGG1L	Karton wysyłkowy 1	780 mm x 180 mm x 140 mm	19.66 dm ³	2920.00 g
4062172325646	LR-P-2000 -927-120D-BK-06-IG-G1 L1	Karton wysyłkowy 1	780 mm x 180 mm x 140 mm	19.66 dm ³	2920.00 g
4062172325684	LR-P-400 -RGB-120D-BK-06-IG-G1 L1	Karton wysyłkowy 1	780 mm x 180 mm x 140 mm	19.66 dm ³	2920.00 g
4062172325608	LR-P-2000 -927-10S-BK-06-IG-G1 L1	Karton wysyłkowy 1	780 mm x 180 mm x 140 mm	19.66 dm ³	2920.00 g
4062172325561	LR-P-2000 -927-10H-BK-06-IG-G1 L1	Karton wysyłkowy 1	780 mm x 180 mm x 140 mm	19.66 dm ³	2920.00 g
4062172325622	LR-P-2000 -927-10S-BK-12-IG-G1 L1	Karton wysyłkowy 1	1380 mm x 180 mm x 140 mm	34.78 dm ³	1150.00 g
4062172325707	LR-P-400 -RGB-120D-BK-12-IG-G1 L1	Karton wysyłkowy 1	1380 mm x 180 mm x 140 mm	34.78 dm ³	1150.00 g
4062172325585	LR-P-2000 -927-10H-BK-12-IG-G1 L1	Karton wysyłkowy 1	1380 mm x 180 mm x 140 mm	34.78 dm ³	1150.00 g
4062172325547	LR-P-1500 -RGBW830-120D-BK-12-IG-G1 L1	Karton wysyłkowy 1	1380 mm x 180 mm x 140 mm	34.78 dm ³	1150.00 g

Karta katalogowa rodziny produktów

Dane logistyczne

4062172325660	LR-P-2000 -927-120D-BK-12-IG-G1 L1	Karton wysylkowy 1	1380 mm x 180 mm x 140 mm	34.78 dm ³	1150.00 g
---------------	------------------------------------	-----------------------	---------------------------	-----------------------	-----------

Wymieniony kod produktu oznacza najmniejszą ilość produktu, jaka może być zamówiona. Jednostka transportowa może zawierać jedną sztukę lub więcej. Składając zamówienie prosimy o zamawianie ilości odpowiadających jednej lub wielokrotności jednostki transportowej.

Oświadczenie

Zastrzega się możliwość zmian bez uprzedzenia. Błędy i ominięcia są możliwe. Należy zawsze upewnić się czy korzystasz z najnowszej wersji katalogu.